




# METALWORKS™ One Way Hook On Ceiling




Non Perforated



Standard Perforated



Micro Perforated



Extra Micro Perforated



green building council australia  
MEMBER

# METALWORKS™ One Way Hook On Ceiling



## Key Selection Attributes

- Contemporary appearance
- Optimum balance between form and function
- Minimum exposed grid
- Custom sizes and perforation options available, including "chilled beam compatible" designs
- Simple accessibility to plenum space
- Durable: Washable Soil Resistant Impact Resistant
- Acoustical performance
- Range of three standard panel sizes and four finishes

## Typical Applications

One Way Hook On Metal Ceilings are versatile and can be applied in a broad range of applications

- Offices
- Conference Rooms
- Foyers
- Corridors
- Healthcare
- Retail
- Transport
- Education



green building council australia  
MEMBER



High Acoustical  
Performance






High Impact  
Resistant

## Technical Data / Installation

Panel Data	Plain Non Perforated	Standard Perforation with Soundtex Fleece	Micro perforation with Soundtex Fleece	Extra Micro Perforation with Soundtex Fleece
Open Area	–	16%	22%	1.50%
Hole Diameter	–	2.5mm	1.5mm	0.7mm
NRC / Alpha W	0.10	0.70 / 0.70(L)	0.80 / 0.75	0.65 / 0.55(L)
CAC / Dncw	44 dB	20 dB*	20 dB*	20 dB*
Design / Finish: Powdercoated in Armstrong Satin White				
1200x300	POSC120307M1WH	POSC120307M10WH	POSC120307M2WH	PMSC120307M3WH**
1350x450	POSC13504507M1WH	POSC13504507M10WH	POSC13504507M2WH	PMSC120407M3WH**
1500x300	POSC150307M1WH	POSC150307M10WH	POSC150307M2WH	POSC150307M3WH**

\* CAC 40, "B15" option available \*\* Perforation size 1.1mm / 3% open area

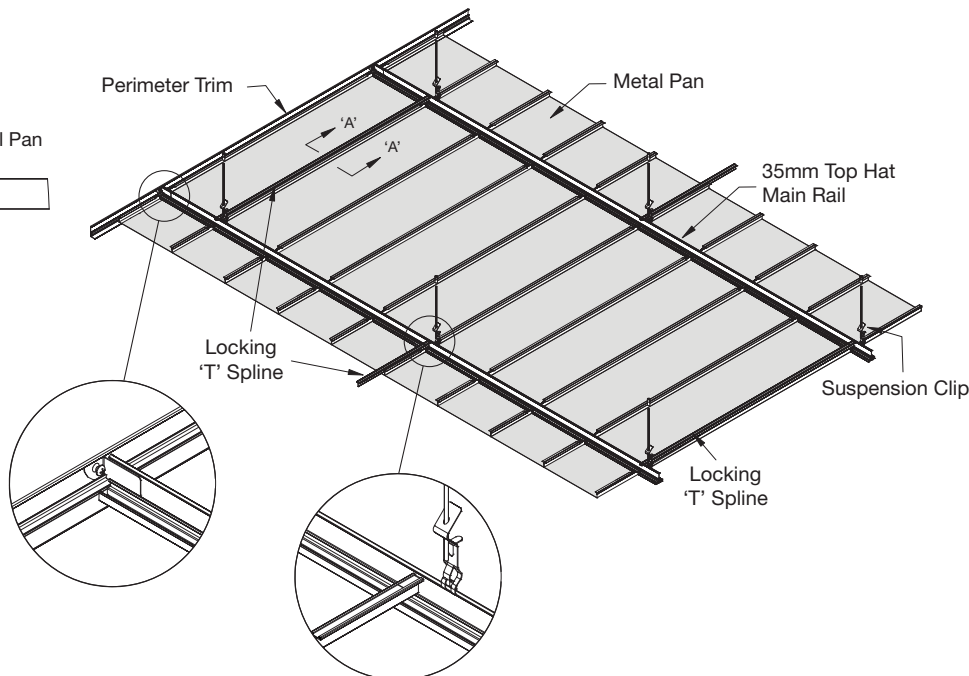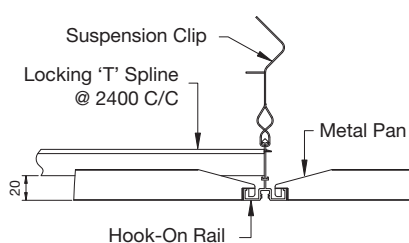

## Physical Data

### Material

Panels: Galvanised Mild Steel  
Suspension System: Extruded Aluminium

### Panel Surface Finish

Polyester powdercoat  
Colours: Standard in Satin White  
RAL colours available upon request

### Edge Detail: One Way Hook On

### Flame Spread/Fire Resistance

Conforms to BCA Spec. C1.10 and tested to AS/NZS3837:1998 – "Group 1"

### Weight

Panel Weight: 4.6kg/sm

### Recommended Suspension System

"Blue Tongue" Aluminium – One Way Exposed"

### Other Resources on web site:

CAD Drawings  
Perforation Catalogue

## Addresses

### Armstrong Offices in Australia

#### NSW

99 Derby Street, Silverwater NSW 2128  
Telephone (02) 9748 1588 | Facsimile (02) 9748 8449

#### VIC/TAS

29-39 Mills Road, Braeside VIC 3195  
Telephone (03) 9580 9633 | Facsimile (03) 9587 5139

#### QLD/NT

6 Barrinia Street, Slacks Creek QLD 4127  
Telephone (07) 3809 5565 | Facsimile (07) 3809 5507

[www.armstrongceilings.com.au](http://www.armstrongceilings.com.au)



Washable



Soil Resistant



Pattern  
Available  
Globally



Relative  
Installed  
Cost  
\$\$\$ / highest pricing  
\$ / lowest pricing